


# Geo6X SP & Geo6X SP KIT

## 3 x 360° in red

Selection PRO

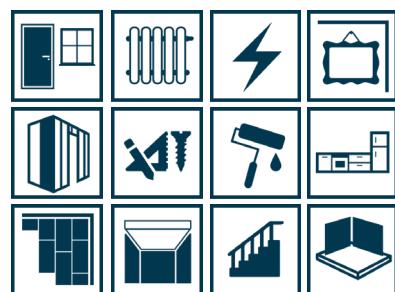

TECHNICAL DATA	GEO6X SP	GEO6X SP KIT	FEATURES GEO6X SP
Self-levelling range	± 3°	± 3°	
Accuracy	± 2 mm / 10 m	± 2 mm / 10 m	
Laser diode / class	red / 2	red / 2	
Working range* (radius)	30 m* (radius)	30 m* (radius)	
Working range with receiver	60 m (radius)	60 m (radius)	
Operating time / power supply			
1 x 360°	16 h / alkaline	20 h / Li-Ion	
2 x 360°	8 h / alkaline	12 h / Li-Ion	
3 x 360°	5 h / alkaline	8 h / Li-Ion	
Dust / water protection	IP 54	IP 54	
Temperature range	-10 °C to +45 °C	-10 °C to +45 °C	
Size	14 x 13 x 8 cm	14 x 13 x 8 cm	
Weight (instrument with battery)	0,8 kg	0,8 kg	

#### SUPPLIED WITH GEO6X SP

ART-NO. 534000

- 4 x Alkaline batteries
- Magnetic target
- Softbag

#### SUPPLIED WITH GEO6X SP KIT

ART-NO. 534100

- Multi-functional mount
- Li-ion battery, charger
- Charger with USB 3.0 cable
- Magnetic target
- Battery case for alkaline batteries
- Container